

1 Quad LED Floodlight

The better, brighter floodlight for small signs and monuments

FEATURES

Luminaire is designed for outdoor lighting applications where a directed light source is required.

Max Lite™ reflector maximizes LED light output.

Maintenance free, vandal-resistant construction.

Installs quickly and easily.

Powered by a separate solar array, ideal for sign lighting, monuments, up lighting, building security, perimeter fence security lighting, remote buildings, and other floodlight applications.

SPECIFICATIONS

Engineered for use with 1Q LED light source.

Silicone gasket and tempered-glass lens.

Standard ½" NPT die-cast swivel fits standard J-box.

Sturdy die-cast aluminum housing and lens frame.

Dark bronze polyester powder-coat finish.

LEDs rated 70,000 hours (L-70)

UL listed for wet locations.

DATA

Fixture	Dimensions Length x Width x Depth (inches)	Weight (pounds)
SOL 1Q LED Floodlight	4.75 x 5 x 4	1.5 lbs.



Sol® 
Reliable. Renewable. Remarkable.

1 Quad LED Floodlight


The better, brighter floodlight for small signs and monuments



Photometric Template 1Q Floodlight Luminaire spaced 2 feet from sign face centered

Typical Grid: Horizontal Illuminance Statistics

Ave: 46.2 fc	Max/Min: 11.0
Max: 109.1 fc	Ave/Min: 4.7
Min: 9.9 fc	Std. Dev.: 28.

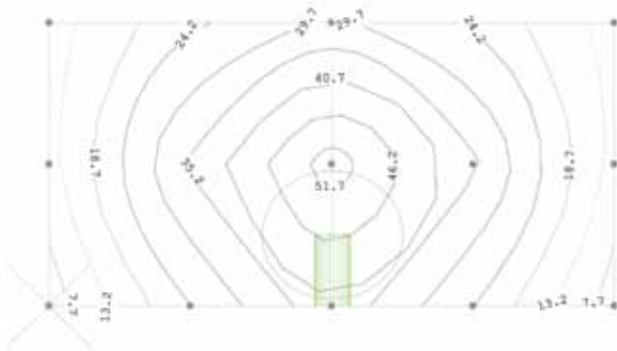


2 x 4 foot sign (1 fixture)
North view

Photometric Template 1Q Floodlight Luminaire spaced 2 feet from sign face centered

Typical Grid: Horizontal Illuminance Statistics

Ave: 12.9 fc	Max/Min: 15.1
Max: 35.1 fc	Ave/Min: 5.5
Min: 2.3 fc	Std. Dev.: 8.9

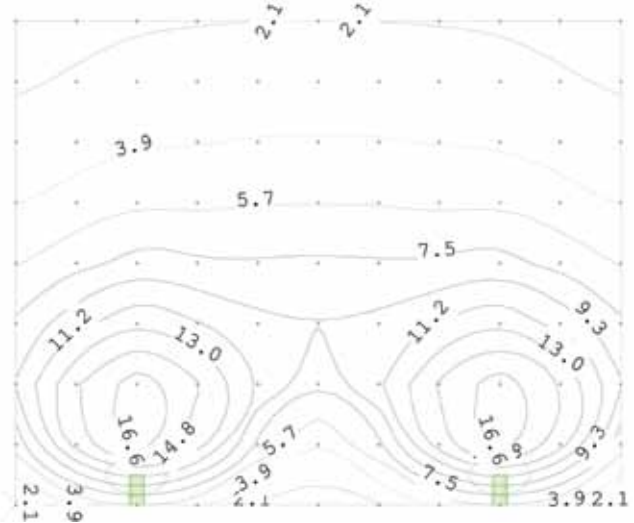

8 x 10 foot sign (2 fixtures)
North view



rev. 0410 MRKT-1QUADFLOOD-001