

LED Shelter Luminaire

FEATURES

Ideal for shelters, gazebos, information kiosks, small buildings and other general lighting applications.


SPECIFICATIONS

- Super efficient, bright, white light, state of the art LED light source; most efficient white light source in its wattage range.
- Excellent color rendering optimizes human visual acuity and contrast, offering best in class night-time (scotopic) vision.
- “Instant-on” – no warm up or cold start issues. Starting and re-igniting period: less than 100 milliseconds.
- Maximizes light utilization, providing a uniform light pattern with concentrated light where it is needed and low light pollution outside of light distribution area.
- Vandal resistant design with stainless steel tamper proof hardware.
- Water tight, sealed, die cast fixture housing with polycarbonate lens.



DATA

LED Type	Strip Type / 70,000 Hours (L-70)
LED Total Power	7 watts
Dimensions	Height, incl. lens – 3.5 in. (8.9 cm) Length – 4.5 in. (11.4 cm) Width – 4.5 in. (11.4 cm)
Weight	1.0 lb. (.45 kg)
LED Enclosure	Water tight, sealed, dust and insect free
Power	12V to 24V DC
LED Driver Efficiency	81% @ 12V / 91% @ 24V
Luminous Efficacy	110 Lumens per watt
Color Temperature (CCT)	5000K
Operating Temperature (Amb.)	-40 F to 120 F
Housing	Die cast corrosion resistant powdercoated aluminum
Lens	Polycarbonate

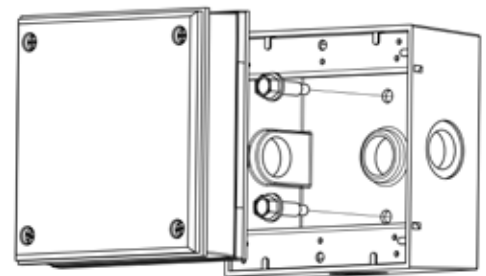

Reliable. Renewable. Remarkable.

rev. 0410 MRKT-LSF-001